



# HID ignitors for MK4 semi-parallel systems

SKD 578 220-240V 50/60Hz

HID ignitors for semi-parallel systems

## Product data

### • General Characteristics

Application code	578
Rated Lamptype	SON/CDM/MH/HPI/HPA/CDO
Rated Number of Lamps	1 piece
Rated Ballast-Lamp Power	35-600
Line Voltage	220-240 V
Line Frequency	50/60 Hz

### • Operating Characteristics

Ignition type	Semi-Parallel
Ignition Attempts	3 -
Number of ignition pulses	1 x
Maximum ignition time	1185 (max) s
Ignition Voltage	1.80 (min), 5.00 (max) kV
Response voltage	190 V
Mains voltage safety (AC)	-10%/+10%
Mains voltage performance (AC)	-8%/+6%
Power losses gear	0.5 W

### • Wiring Characteristics

Connector type	Screw
Striplength	6.0 mm
Wcs Ballast contacts	0.50-2.50 mm2

### • Temperature Characteristics

T-case maximum	90 (max) C
T-ambient	-30 (min), 85 (max) C
T-storage	-35 (min), 85 (max) C

### • Product Dimensions

Length A1	63.5 mm
Width B1	40.5 mm
Height C1	28.0 mm

### • Approval & Application Chars

CE marking	Yes
ENEC certificate	Yes


### • Product Data

Order code	913700655366
Full product code	913700655366
Full product name	SKD 578 220-240V 50/60Hz
Order product name	SKD 578 220-240V 50/60Hz
Pieces per pack	1
Packing configuration	48
Packs per outerbox	48
Bar code on pack - EAN1	8727900771312
Bar code on outerbox - EAN3	8727900895674
Logistic code(s) - 12NC	913700655366
Net weight per piece	28.000 gr

**PHILIPS**

# HID ignitors for MK4 semi-parallel systems

## Dimensional drawing

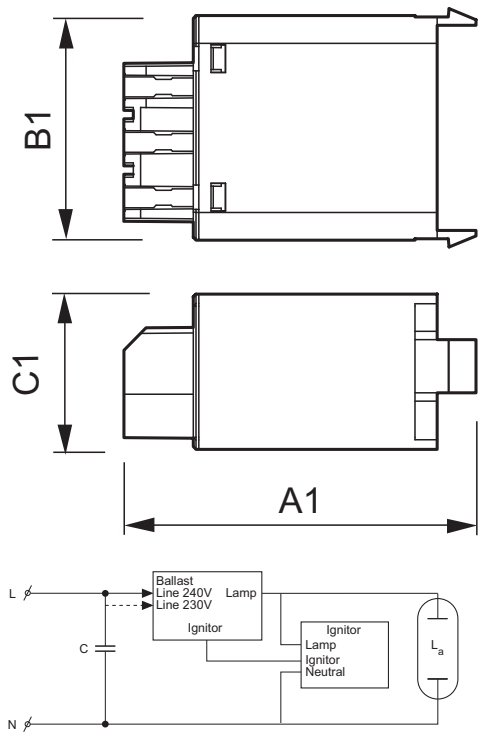

### SKD 578 220-240V 50/60Hz

Product	A1 (Norm)	A2 (Norm)	B1 (Norm)	C1 (Norm)	D1 (Norm)
SKD 578 220-240V 50/60Hz	63,5	-	40,5	28,0	-



© 2015 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2015, August 29  
data subject to change