

Xitanium Constant Current Outdoor

Xitanium 30W 0.70A 230V 50/60Hz Otd 30

Long-lasting and low maintenance, LED-based light sources are an excellent solution for outdoor environments. For optimal performance, LED luminaires require reliable drivers which match the long lifetime of the LEDs. Xitanium Constant Current Outdoor product family offers a selection of LED drivers with lower output voltages in a range of convenient form-factors and wattages. The Xitanium Outdoor drivers are SELV (Safety Extra Low Voltage) compliant, enabling easy LED light engine design.

Product data

• General Characteristics

Input Frequency	50/60 Hz
Relative Humidity	95 %
IP Classification	IP44
Lifetime 90% surv.@Tcaselife	50000 hr
Housing Colour	White

• Operating Characteristics

Input Power max	40 W
Output Voltage Range	18-42 V
Output Current Range (mA)	700
Input Current max	170 (max) mA
Output Current Tolerance	-5 (min), 5 (max) %
Input Voltage Range (AC)	220-240 V

• Wiring Characteristics

Connection on driver to L2	Wire
Input Wire Length	140 mm
Output Wire Length	140 mm

• Temperature Characteristics

T-case maximum	80 (max) C
T-ambient	-20 (min), 50 (max) C

• Product Dimensions

Length A1	150 mm
Width B1	41.5 mm
Height C1	33 mm
Fixing Hole Distance	138.5 mm
Length A2	

• Approval&Application Chars

Isolation classification	Class II
--------------------------	----------


• Product Data

Order code	936896 00
Full product code	872790093689600
Full product name	Xitanium 30W 0.70A 230V 50/60Hz Otd 30
Order product name	Xitanium 30W 0.70A 230V 50/60Hz Otd 30
Pieces per pack	1
Packing configuration	20
Packs per outerbox	20
Bar code on pack - EAN1	8718291999751
Bar code on outerbox - EAN3	8727900936896
Logistic code(s) - 12NC	929000617901
Net weight per piece	0.274 kg

PHILIPS


Xitanium Constant Current Outdoor

Dimensional drawing

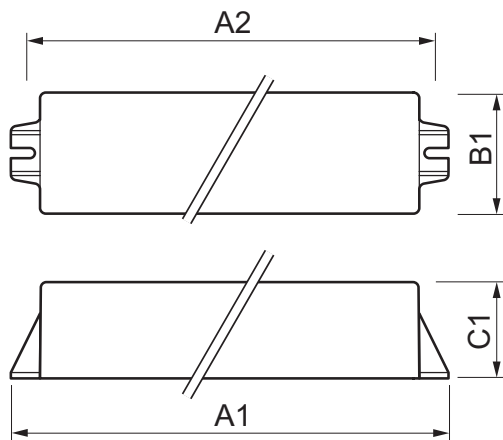

Xitanium 30W 0.70A 230V 50/60Hz Otd 30

Product	A1 (Norm)	A2 (Norm)	A3 (Norm)	B1 (Norm)	B2 (Norm)	C1 (Norm)	D1 (Norm)	X1 (Norm)
Xitanium 30W 0.70A 230V Otd	150	138.5	-	41.5	-	33	-	-



© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, April 25
data subject to change